

**Please read and save these instructions. Read carefully before attempting to assemble, install, operate or maintain the product described.**

**Protect yourself and others by observing all safety information. Failure to comply with instructions could result in personal injury and / or property damage! Retain instructions for future reference.**

# AMERICOOOL by WELTEM

## High Capacity Air Conditioner

(For Indoor & Outdoor)

### Description

**AmeriCool** Portable Air Conditioners are specialized for "SPOT COOLING" where central cooling is impractical.

**AmeriCool** air conditioners can also be used in enclosed areas just like conventional air conditioners. Simple digital controller and self-diagnostic functions allow users to easily operate the unit. Built-in Caster wheels enable users to move the unit without any hassle. The unit can be installed in 5 minutes and does not require any extra materials or certified technician for installation.

**AmeriCool** Portable Air Conditioner, anywhere, everywhere. Plug-and-Go!



**WPC-18000**  
**Figure 1**

### Unpacking

After unpacking the unit, carefully inspect unit for any damage that may have occurred during transit. Check for any loose, missing, or damaged parts.

### Specifications

Model No.	Power Supply (Phase-V-Hz)	Cooling Capacity (Btu/h)	Power Consumption (Watts)	Rated Current (Amps)
WPC-18000	1Phases - 220V - 60Hz	60000	6.5kW	30.2A
Model No.	Weight (Net / Gross) Lbs(kg)	Operating Ambient Temperature Range	Dimensions W x D x H - in. (mm)	
WPC-18000	672/728lbs. (305/330kg)	64~113 °F (18~45 °C)	29.5 x 62.1 x 58.1 (750 x 1578 x 1478 )	

## Specifications (Continued)

Model No.	Evaporator(Cool) Air Flow (CFM)	Refrigerant Type / oz(g)
WPC-18000	1998	For a compressor: R-410, 56.4oz (1600g) Total: 102.8oz (3200g)
Safety Devices	Compressor overload protector, Anti-freezing thermister, Automatic restart (Power interruption), Compressor time delay program, High pressure switch	
Features	Temperature control, Self-diagnostic function, Optional drain pump kit, Washable filters, °F( °C) display, Off-timer	

## General Safety Information

Please read this manual carefully for correct installation and usage. Please read all safeguards.

1. Transport and store the unit in an upright position only. Leave unit in an upright position for at least 3 hours before first use.
2. Always place the unit on an even, level surface.
3. Ensure the unit is connected to a grounded power supply of the correct rating / capacity.
4. The unit will operate between 18°C (64°F) ~ 45°C(113°F) depending on the temperature setting.
5. DO NOT use this unit for other purposes that is not described in this instruction manual.
6. DO NOT tilt the unit.
7. NEVER unplug the unit under operation.

**⚠ WARNING** *DO NOT use the unit in wet environments, such as a laundry room, to avoid the risk of electrical shock.*

10. DO NOT place any foreign objects on the unit.
11. DO NOT operate the unit with wet or damp hands.
12. DO NOT allow chemical substances to come into contact with the unit.
13. DO NOT operate the unit near flammable substances or vapors such as alcohols, pesticides, gasoline, etc.

**▲ WARNING** *DO NOT operate the unit in explosive or flammable environments.*



14. DO NOT unplug to turn off the unit. Always use the power switch to start and to stop the unit.
15. Always turn off the unit and unplug it before cleaning, moving or performing maintenance.
16. AVOID using adapter plugs or extension cords. If extension cord or an adapter plug is needed, ensure they are correctly rated for the application. Consult a local qualified electrician for proper setup. Any extension cord used with this device must be rated for a minimum of 24A.(380V)
17. DO NOT unplug the unit by pulling on the electrical cord. Keep electrical cord away from heat sources and always completely unroll the cord to avoid overheating. If the power cord is damaged, contact a qualified service agent, qualified electrician, or similarly qualified person for replacement.

**▲ WARNING** *DO NOT operate a unit with a damaged power cord.*


18. The filters must be used with the product at all times. When the filters are removed for cleaning, always ensure that the unit has been turned off and unplugged from the electrical outlet.
19. Regularly clean the filters to maintain efficiency. If the filters are not cleaned regularly, the units output performance and efficiency will decrease.
20. DO NOT operate the unit with a damaged power cord or plug,
21. Only use in the upright position on an even, flat surface. There must not be any objects or walls within 24 inches (60 cm) from the unit.
22. Halt the unit immediately if abnormal noise or odor is detected. Contact your local service center or manufacturer.
23. Appliance is not to be operated by children or persons with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction.
24. Children must be supervised not to play with appliance.
25. The unit must be installed in accordance with national wiring regulations.
26. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard. .

# Assembly (WPC-18000)

## COMPONENT PARTS

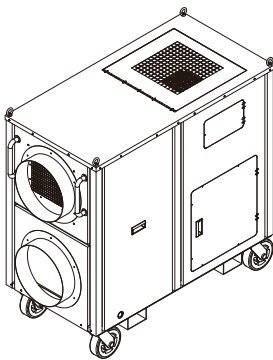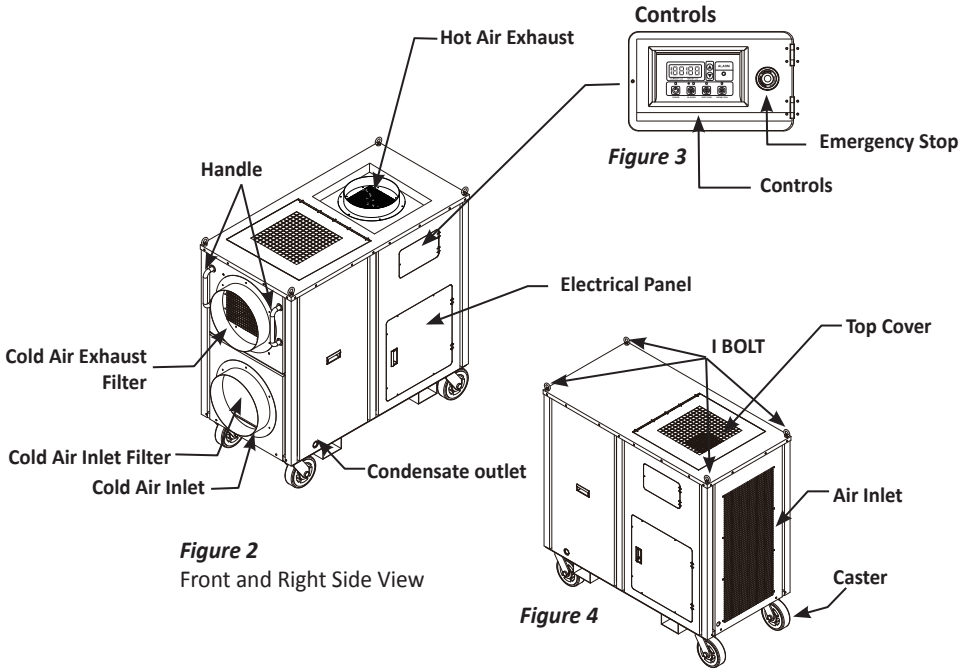

Not in operation  
**Figure 5**

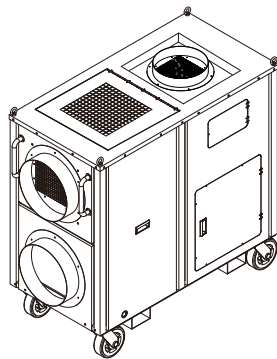

In operation  
**Figure 6**

## DUCT CONNECTIONS

### *Cool Air Duct (OUT) connection*

The Cool Air Ducts (OUT) are labeled "AIR OUT". The diameter of the duct is 400Ø.


Connect the flexible air duct as following

1. Attach a flexible duct to the duct collar. Use a clamp or any appropriate apparatus around the collar to prevent any air leakage.
2. Route the flexible duct as straight as possible to the desired space without any excessive turns and pinches.
3. Please avoid any objects or walls at the end of the duct.

### *Cool Air in Duct (IN)*

The Return Air In duct connection is labeled "AIR IN".

The diameter of the duct is 400Ø. Follow the same procedures as "Cool Air Duct (Out) connection". If you want to use the unit without any "AIR IN" duct, the unit will read the temperature of the surroundings.

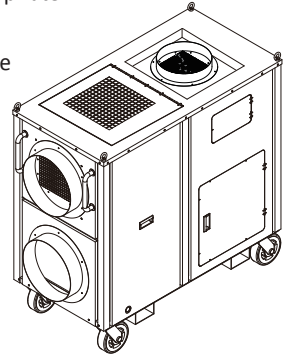

**Figure 7**


### *Hot Air Duct*

The Hot Air Out duct connection is labeled "AIR OUT"

The diameter of the duct is 450 Ø and maximum duct length is 30M. Follow the same procedures as the cool air duct connections.


### *Fork Lift*

If a forklift is needed to move the unit, put the foot of the forklift to the forklift hole (shown in the picture: figure 8).



**Figure 9**

***Casters can be locked by locking the break down***

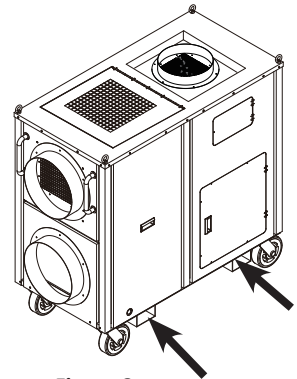

**Figure 8**

## Installation

### WARNINGS REGARDING PROPER LOCATION FOR INSTALLATION

**▲ WARNING**

*Do not use the unit in explosive environments or in areas where flammable gas leakage may occur.*

**▲ WARNING**

*Do not use the unit in areas where it will be exposed to rain or water.*

**▲ WARNING**

*Do not use the unit in a corrosive atmosphere.*

**▲ WARNING**

*Do not use the unit above 18°C(64°F) ~ 45°C(113°F).*

**▲ WARNING**

*Do not install the unit on uneven or sloping surface. The unit may roll or topple over even if the casters are set to the locked position.*

## MOVING THE UNIT

Unlock the casters and push the unit using the side handles to a flat, level surface and set the caster brakes to the locked position.

## PLUGGING IN THE UNIT

Check the prongs and surface of the power cord plug for dust/dirt. If dust and / or dirt are present, wipe off with a clean, dry cloth.

Check the power cord, plug and prongs for any damages

If you suspect any damage or deterioration, contact a qualified technician to perform replacement or repair

**▲ WARNING**

*If the power cord or plug is damaged, repair should only be performed by qualified electrical personnel.*

**▲ WARNING**

*Do not connect / disconnect the power cord or attempt to operate buttons with wet hands. This could result in electrical shock.*

**NOTE:** Make sure the AC outlet is free of dirt, dust, oil, water, or any other foreign material. The unit is equipped with an approved NEMA plug configuration. The appropriate outlet must be used for each plug type.

## Operation

### CONTROL PANEL

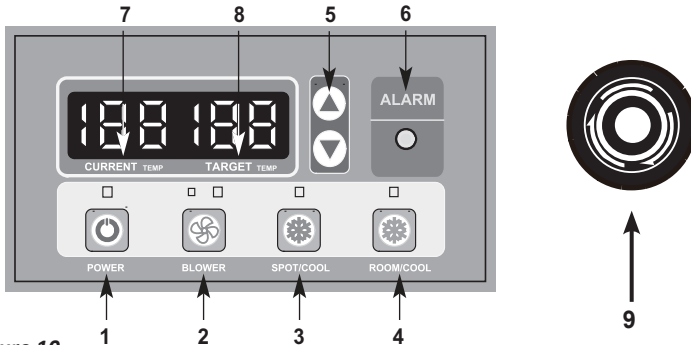


Figure 10

#### 1. POWER BUTTON :

Turns on/off the unit when the button is pressed for 1 second.

#### 2. BLOWER BUTTON :

Adjusts the fan speed from (Low) to (High) when the button is pressed for 1 second.

**NOTE:** Some models only have one fan speed

#### 3. SPOT/COOL BUTTON :

Activates Spot Cooling mode when the button is pressed for 1 second. Compressor can be switched on/off

#### 4. ROOM/COOL BUTTON :

Activates Room Cooling mode when the button is pressed for 1 second. Compressor can be switched on/off

#### 5. UP/DOWN BUTTON :

Sets target temperature in ROOM or SPOT COOL MODE.

#### 6. ALARM :

The alarm indicator will flash when the unit detects abnormal operation. The compressor will stop after the alarm and the system will stop after 3 minutes of alarm unless there is any action taken to fix the issue.

## Operation

### CONTROL PANEL

#### 7. CURRENT TEMP :

Displays Current temperature

**NOTE:** Canadian version shows the temperature in Celsius.

#### 8. TARGET TEMP :

Displays target temperature

**OFF-TIMER :** Press BLOWER Button and SPOT/COOL Button simultaneously for 2 seconds to set off-timer. Press UP/DOWN Button to set the timer. After you set off-timer, idle for 5 seconds to save the off-timer setting. To cancel OFF-TIMER, set the timer to 0.

**AUTO RESTART :** If the unit turns off due to an electrical interruption, the unit will automatically restart when the power comes back on.

#### 9. EMERGENCY STOP :

Emergency stop button immediately halts the operation

1. Press the red button – Unit stops
2. Inspect the unit.
3. Rotate the red button clockwise to restart the unit




## Maintenance


### FILTER CLEANING *(See Figures 11 and 12)*

1. Unscrew 6 bolts on the front filter guard.
  2. Slide filter up and use a vacuum cleaner to remove the dust from the filter.
  3. If the filter is heavily covered with dust and dirt, use warm water and mild soap or neutral detergent to wash the filter.
- Do not use any other chemicals to clean filter.
4. Dry the filter in a shaded area before replacing it. Do not operate the unit without the filter.
  5. Place the clean filter and close the filter guard.

**NOTE: For effective cooling, clean the filter at least once in 2 weeks**



- Unscrew 6 bolts on the front filter guard.
- Slide filter up and use a vacuum cleaner to remove the dust from the filter.



- If the filter is heavily covered with dust and dirt, warm water and mild soap or neutral detergent may be used to wash the filter. Do not use any other chemicals to clean filter.
- Dry the filter in a shaded area before replacing it. Do not operate the unit without the filter.

**Figure 11 – Removing Filters**

**Figure 12 – Removal of Dust**

**▲ WARNING** Do not operate without the filter.

**▲ WARNING** Do not operate the unit with a damaged cord or plug. Do not operate the unit if there is any sign of malfunction. Do not operate the unit that has been dropped or damaged

- For your convenience, record the complete model number and product name (located on the Product Identification Plate), the purchase date, purchase location, serial number, and warranty period in the table below.
- Also, attach your purchase receipt as proof of purchase to this instruction manual for future reference.
- To ensure your product is covered by warranty, the complete faulty product along with your original purchase receipt must be provided at the place of purchase.

## Maintenance *(Continued)*

– To ensure your product is covered by warranty, the complete faulty product along with your original purchase receipt must be provided at the place of purchase.






<u>Product</u>	<u>Portable Air Conditioner</u>
Model No.	_____
Date of Purchase	_____
Place of Purchase	_____
Serial No.	_____
Period of Warranty	_____

**Customer:** Please read and keep this manual for future reference and keep sales receipt as proof of purchase.

## SELF-DIAGNOSTIC CODES *(See Table 1)*

The alarm will activate when the unit detects any abnormality. It will show certain alarm code to indicate the source of problem. The compressor and condenser fan will stop working when alarm goes on. The evaporator fan will still be working for 3 minutes. If no actions are taken for 3 minutes after initial alarm, the evaporator fan will stop too. Please refer to the alarm codes in next page and follow the solutions provided to fix the unit.

**NOTE: The alarm code will be displayed on CURRENT TEMP display**

SELF-DIAGNOSTIC ALARM CODES			
Alarm Display	Problem	Cause	Solutions
	Abnormal temperature	<ul style="list-style-type: none"> <li>Ambient temperature is too low</li> <li>Temperature sensor is damaged, loose or short/open</li> </ul>	<ul style="list-style-type: none"> <li>Do not use the air conditioner if ambient temperature is below 18°C (64°F)</li> <li>Contact a qualified service agent</li> </ul>
	High Pressure	<ul style="list-style-type: none"> <li>Blocked Air filter</li> <li>Blocked exhaust duct</li> <li>Ambient temperature is too high</li> </ul>	<ul style="list-style-type: none"> <li>Clean air filter</li> <li>Ensure duct is not blocked or kinked</li> <li>Ensure the working temperature is below 45°C</li> </ul>
	Abnormal temperature	TH1(Outlet) temperature sensor has a loose or broken connection	Contact a qualified service agent
	Abnormal temperature	TH2(Inlet) temperature sensor has a loose or broken connection	Contact a qualified service agent
	Compressor overloaded	<ul style="list-style-type: none"> <li>Ambient temperature is too high</li> <li>Unstable voltage supply</li> <li>Defective</li> </ul>	<ul style="list-style-type: none"> <li>Do not use the air conditioner if ambient temperature is above 45°C (113°F)</li> <li>Contact a qualified service agent</li> <li>Replace the compressor</li> </ul>

**Table 1- Alarm Codes**

## Wiring Diagram

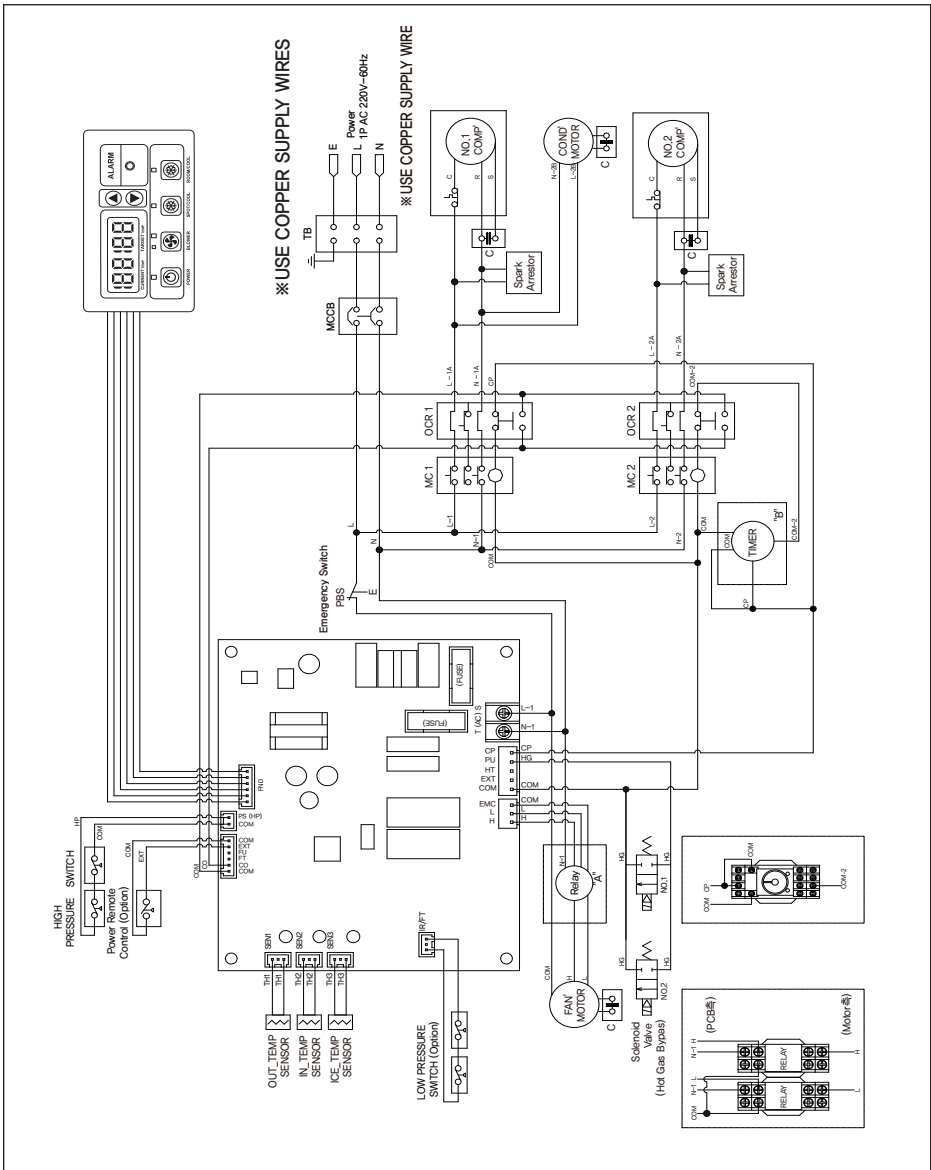


Figure 14 - Circuit Wiring Diagram (WPC-18000)

## TROUBLESHOOTING

Symptom	Possible Cause(s)	Solutions
Unit does not start.	<ol style="list-style-type: none"> <li>1. Check the power supply</li> <li>2. Check whether the power cord is connected</li> </ol>	<ol style="list-style-type: none"> <li>1. Reset the circuit breaker and restart the unit</li> <li>2. Connect power cord</li> </ol>
No cold air from the cold air outlet	<ol style="list-style-type: none"> <li>1. The filter is dirty and air flow is blocked</li> <li>2. Compressor will not work if the unit is turned on and off too quickly</li> <li>3. Ambient temperature is too high</li> </ol>	<ol style="list-style-type: none"> <li>1. Clean the filter</li> <li>2. Wait 2 minutes after unit is turned off before turning the unit back on.</li> <li>3. The temperature of the compressor can be extreme hot when the ambient temperature is too high. The compressor will not work unless the ambient air temperature is within the acceptable operating range of the unit</li> </ol>
Can hear water flowing after the compressor is turned off	Normal operation Not a defect	It is common to hear coolant flowing after the unit turns off

## **SHIPPING LIST**

- (1) High Capacity Air Conditioner
- (1) Owner's Manual

## **OBTAINING SERVICE**

If the Weltem High Capacity Air Conditioner by AmeriCool requires Service:

1. Use the TROUBLESHOOTING section in this manual to eliminate obvious causes.
2. Verify there are no circuit breakers tripped.
3. Call your dealer for assistance. If you cannot reach your dealer, or if they cannot resolve the problem, call AmeriCool Technical Support at 888-726-6158 Please have the following information available BEFORE calling the Technical Support Department:
  - a. Your name and address.
  - b. The serial number of the unit.
  - c. Where and when the unit was purchased.
  - d. All of the model information about your Weltem High Capacity Air Conditioner by AmeriCool.
  - e. Any information on the failure, including LED's that may or may not be illuminated.
  - f. A description of the protected equipment, including model numbers if possible.

## LIMITED WARRANTY

AmeriCool warrants all AmeriCool products to be free from defects in materials or workmanship, under normal use and service, for a period of 12 months from the date of purchase to the end user (original invoice must be provided). AmeriCool warrants that the compressor will be free from defects in materials and workmanship for 12 months from the date of purchase to the end user.

AmeriCool's obligation under this warranty is limited to the repair or replacement at its option, of any part or parts, which, upon AmeriCool's examination are shown to be defective, or at AmeriCool's option, the return of the purchase price to the purchaser.

Correction of such defects by repair or replacement, or at AmeriCool's option, the return of the purchase price shall constitute fulfillment of warranty obligations to the purchaser. This warranty does not cover defects or malfunctions which result from causes beyond AmeriCool's control, including, without limitation, (i) unusual physical or electrical stress; (ii) accident, neglect, abuse, misuse or other abnormal use; (iii) failure to perform routine maintenance in accordance with AmeriCool's recommended procedures; (iv) normal wear and tear; (v) repairs or attempted repairs by an unauthorized person; (vi) modifications or alterations to the Products; (vii) use with parts or devices not supplied or approved by AmeriCool (viii) improper installation or service; (ix) shipping damage to any units or spare parts during shipping. This includes and is not limited to compressors, evaporators and condenser coils. This warranty shall extend only to the original end-user and shall be void if any labels or other identifying marks permanently affixed to Products when shipped by AmeriCool are removed, altered, defaced or obliterated.

TO THE EXTENT PERMITTED BY LAW, THIS WARRANTY, AS LIMITED HEREIN, SHALL BE IN LIEU OF AND EXCLUSIVE OF ALL OTHER WARRANTIES, EITHER EXPRESSED OR IMPLIED, ON THE PART OF AMERICOOOL INC., OR WELTEM CO., LTD. WHETHER ARISING FROM LAW, COURSE OF DEALING, USAGE OF TRADE, OR OTHERWISE, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS OF A PARTICULAR PURPOSE OR ANY LIABILITY FOR COMMERCIAL LOSSES BASED UPON NEGLIGENCE OR MANUFACTURER'S STRICT LIABILITY. EXCEPT AS EXPRESSLY PROVIDED HEREIN, NEITHER AMERICOOOL, INC., NOR WELTEM CO., LTD. WILL, IN ANY EVENT, BE LIABLE FOR LOST PROFITS, COSTS OF PROCESSING, INJURY, GOODWILL, OR ANY OTHER CONSEQUENTIAL DAMAGES OF ANY KIND ARISING FROM BREACH OF THIS WARRANTY.

**Manufactured in Weltem Co., Ltd.,  
154, Jayumyeok 3-gil, Masanhoewon-gu, Changwon-City, Gyeongsangnam-do,  
Republic of KOREA 51340 [www.weltem.com](http://www.weltem.com)**

**Distributed by Americool, Inc. In the USA (Tel.888-726-6158)  
[WWW.AMERICOOOLLLC.COM](http://WWW.AMERICOOOLLLC.COM)**